

Fryer with rail mounted basket

The Electrolux 900-Line of modular cooking equipment is designed to meet the heavy duty cooking requirements of institutional caterers and the larger restaurants and hotel kitchens. The flexibility of the modular design, with innumerable configurations either free-standing, bridged or cantilever, can be precisely tailored to meet the needs of the caterer. The range consists of 4 models, 2 models with 1 well and 2 models with 2 wells, in gas or electric versions.



211024

EASY TO USE

- Height-adjustable stainless steel feet.
- Safety thermostat for interrupting operation in case the main thermostat fails to cut in, or if there is no oil.
- Oil drainage valve with insulated handle.
- Elevating, sliding, opening and counter-balanced basket for easier lifting.
- Base of the basket can be opened for emptying the cooked products into storage containers.

EASY TO MAINTAIN

- Load bearing frame, external panelling, well and basket in 304 AISI stainless steel.
- Front and inside panels in 304 AISI stainless steel with magnetic closure for gas models.

- Rail mounted basket system in 304 AISI stainless steel.
- Full range of safety devices.
- Easy access and inspection of working parts for cleaning and maintenance.
- All models comply with the standards required by the main international approval bodies and are CE marked.

* In accordance with CE regulations for gas models belonging to Class B11 (power over 14 kW), it is necessary to install a chimney (if installed under a hood) or chimney and draft diverter if the waste gases are vented directly outside.

EASY ON THE ENVIRONMENT


- Container trolley for transfer of the cooked products to distribution supplied as standard.

GAS MODELS

- Heating via flame tubes positioned across the cooking well.
- Ignition via a pilot light and an analogue thermometer to show oil temperature.
- Thermal generator inside the appliance for the electrical supply to the gas valve. The appliance does not require connection to mains electricity.
- No parts under voltage. Insulation panel for the burners.

ELECTRIC MODELS

- Heating via armoured elements immersed in the well.
- Mains switch and an analogue thermometer to show oil temperature.
- Low voltage 24V controls.

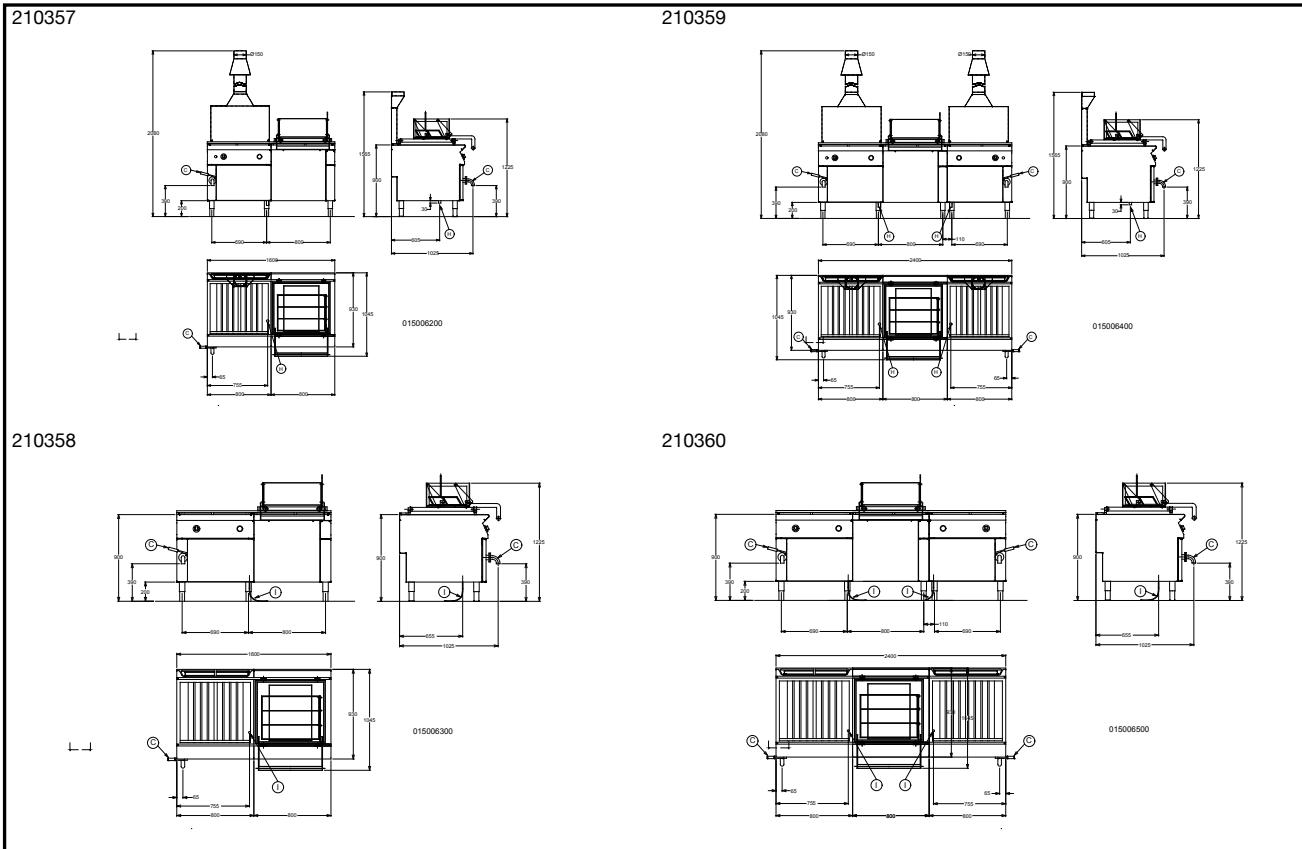

	ZFRSG6SRB 210357	ZFRSG8DRB 210359	ZFRSE6SRB 210358	ZFRSE8DRB 210360
LEGEND				
H - Gas connection	3/4"	3/4"		
I - Electrical connection			400 V, 3N, 50	400 V, 3N, 50
TECHNICAL DATA				
Power supply	Gas	Gas	Electric	Electric
Installation	FS on floor	FS on floor	FS on floor	FS on floor
Configuration	Free Standing	Free Standing	Free Standing	Free Standing
External dimensions - mm				
width	1600	2400	1600	2400
depth	930	930	930	930
height	850	850	850	850
External dimensions - mm				
height adjustment	50	50	50	50
N° of wells	1	2	1	2
Thermocouple safety valve	●	●		
Well capacity - min/max - lt.	70, 110	70, 110	70, 110	70, 110
Control Knob	Electrical thermostat; Pilot flame ignition; Thermocouple safety valve	Electrical thermostat; Pilot flame ignition; Thermocouple safety valve	Electrical thermostat	Electrical thermostat
Power - kW				
gas	40	80		
Power - kW				
installed-electric			35	70
Net weight - kg.	234	418	224	398
Supply voltage			400 V, 3N, 50	400 V, 3N, 50
INCLUDED ACCESSORIES				
EXTRA TROLLEY FOR RAIL MOUN.BASKET FRYER	1	1	1	1
ACCESSORIES				
DRAUGHT DIVERTER WITH 150 MM DIAMETER	206132	206132		
EXTRA TROLLEY FOR RAIL MOUN.BASKET FRYER	922404	922404	922404	922404
GN 1/1 H= 40 CONTAINER WITH HANDLES+LID	329204	329204	329204	329204
GN 1/1 H= 65 CONTAINER WITH HANDLES+LID	329206	329206	329206	329206
GN 1/1 H= 65 PERFORATED CONTAINER+HANDLE	329226	329226	329226	329226
GN 1/1 H=100 CONTAINER WITH HANDLES+LID	329210	329210	329210	329210
GN 1/1 H=100 PERFORATED CONTAINER+HANDLE	329230	329230	329230	329230
GN 1/1 H=150 CONTAINER WITH HANDLES+LID	329215	329215	329215	329215
GN 1/1 H=150 PERFORATED CONTAINER+HANDLE	329235	329235	329235	329235
GN 1/1 H=200 CONTAINER WITH HANDLES+LID	329220	329220	329220	329220
GN 1/1 H=200 PERFORATED CONTAINER+HANDLE	329240	329240	329240	329240
MATCHING RING FOR FLUE CONDENSER 150DIAM	206133	206133		
SIDE HANDRAIL-RIGHT/LEFT HAND	216044	216044	216044	216044

Elco 900

Fryer with rail mounted basket

CANL010

2008-04-03

Subject to change without notice