

## Freezer counters 290 lt

The Electrolux range of freezer counters combines the convenience of worktop space with frozen storage located below. This range of counters is manufactured throughout in AISI 304 stainless steel to meet the highest hygiene standards.

The range comprises three sizes of cabinet, with built-in or remote compressor units, in various door or drawer configurations and in refrigerator or freezer versions. The models detailed on this sheet have 2 full doors and operate over the temperature range of  $-18^{\circ}\text{C}$  to  $-24^{\circ}\text{C}$ .



726577

### EASY TO INSTALL

- Mounted on legs with height adjustment.
- Built-in or remote compressor to suit operating conditions.
- Suitable for use in ambient temperatures of up to  $43^{\circ}\text{C}$ .

### EASY TO CLEAN

- Constructed from AISI 304 stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs to give 150 mm clearance for ease of cleaning the floor.

### EASY TO USE

- Adjustable temperature range from  $-18^{\circ}\text{C}$  to  $-24^{\circ}\text{C}$  to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN1/1 containers.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Worktop in AISI 304 stainless steel with a 50 mm thickness.
- Available version with integrated rear upstand.

### EASY TO MAINTAIN


- Access to all components from the front.
- In compliance with CE requirements.

### EASY ON THE ENVIRONMENT

- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- 60 mm insulation thickness for energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



**Electrolux**

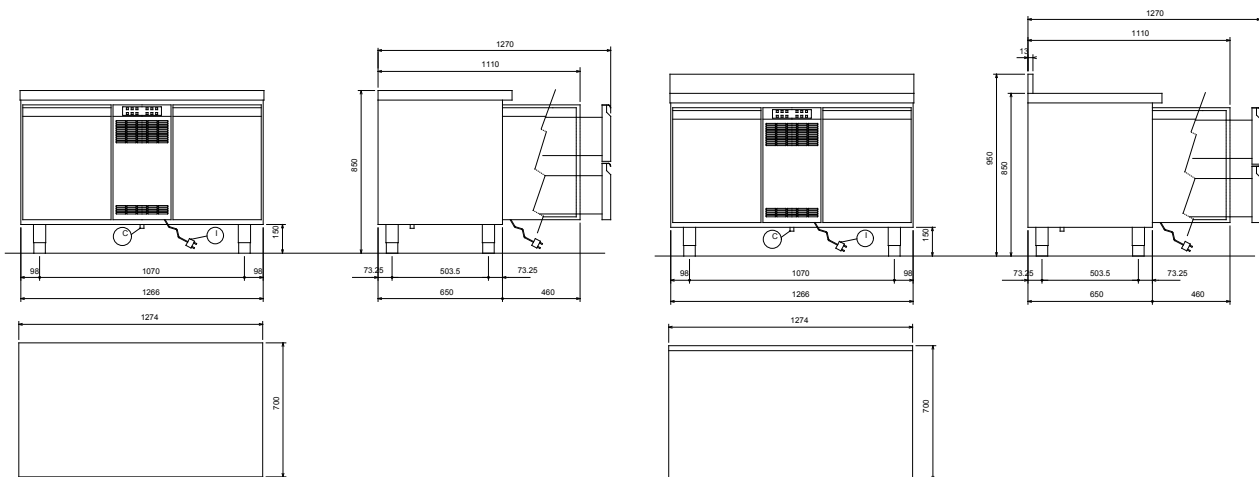

|   | RCDF2M20<br>726577 | RCDF2M20U<br>726578                | RCDF2M20R<br>726579 |
|---|--------------------|------------------------------------|---------------------|
| <b>LEGEND</b>                             |                    |                                    |                     |
| C - Water drain                           | 16mm               | 16mm                               | 16mm                |
| I - Electrical connection                 | 230 V, 1N, 50      | 230 V, 1N, 50                      | 230 V, 1N, 50       |
| L - Remote electrical connection          |                    |                                    | ●                   |
| M - Remote refrigeration connection       |                    |                                    | ●                   |
| <b>TECHNICAL DATA</b>                     |                    |                                    |                     |
| Operating temperature - min/max °C        | -22/-15            | -22/-15                            | -22/-15             |
| Operating mode                            | Ventilated         | Ventilated                         | Ventilated          |
| Gross capacity (D.I.N. 8952) - l.         | 291                | 291                                | 291                 |
| Cooling unit                              | Built-In           | Built-In                           | Remote              |
| External dimensions - mm                  |                    |                                    |                     |
| width                                     | 1274               | 1274                               | 1274                |
| depth/with open doors                     | 700, 1110          | 700, 1110                          | 700, 1110           |
| height                                    | 850                | 950                                | 850                 |
| Worktop type                              | Stainless Steel    | Stainless Steel with<br>Splashback | Stainless Steel     |
| N° and type of door                       | 2                  | 2                                  | 2                   |
| Door hinges                               | 1 Left+1 Right     | 1 Left+1 Right                     | 1 Left+1 Right      |
| N° and type of grids (included)           | 2, GN 1/1          | 2, GN 1/1                          | 2, GN 1/1           |
| Compressor power - HP                     | 3/4                | 3/4                                |                     |
| N° defrost in 24 hrs.                     | 4/16'              | 4/16'                              | 4/16'               |
| Refrigerant type                          | R404a              | R404a                              | R404a               |
| Refrigerant quantity - g.                 | 280                | 280                                |                     |
| Refrigerant power - W                     | 925                | 925                                |                     |
| Evaporation temperature - °C              | -31                | -31                                | -31                 |
| Power - kW                                |                    |                                    |                     |
| installed-electric                        | 0.75               | 0.75                               | 0.078               |
| Net weight - kg.                          | 129                | 130                                | 115                 |
| <b>INCLUDED ACCESSORIES</b>               |                    |                                    |                     |
| 1/1 GN GREY "RILSAN" GRID                 | 2                  | 2                                  | 2                   |
| <b>ACCESSORIES</b>                        |                    |                                    |                     |
| 1/1 GN GREY "RILSAN" GRID                 | 881435             | 881435                             | 881435              |
| 2 WHEELS FOR REFRIGERATORS/REFRIG. TABLES | 880539             | 880539                             | 880539              |
| HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)   | 880119             | 880119                             | 880119              |
| HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)   | 880132             | 880132                             | 880132              |
| HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)   | 880133             | 880133                             | 880133              |
| KIT 1 DOOR FOR REFRIGERATOR COUNTER       | 881517             | 881517                             | 881517              |
| LOCK FOR REFRIGERATED COUNTERS            | 881499             | 881499                             | 881499              |
| PLASTIC CONTAINER GN 1/1 H=100 MM         | 811451             | 811451                             | 811451              |
| PLASTIC CONTAINER GN 1/1 H=150 MM         | 881040             | 881040                             | 881040              |
| PLASTIC CONTAINER GN 1/1 H=65 MM          | 881038             | 881038                             | 881038              |
| PRINTER FOR HACCP BASIC VERSION REFRIG.   | 881457             | 881457                             | 881457              |
| REMOTE UNIT -24-15°C FOR 550/650 LT       |                    |                                    | 881465              |